


NOTES:

1. CASTINGS FOR MONUMENT CASES, COVERS, AND RISERS SHALL BE GRAY IRON CASTINGS CONFORMING TO THE REQUIREMENTS OF AASHTO M 105, CLASS 30B.
2. THE COVER AND SEAT SHALL BE MACHINED SO AS TO HAVE PERFECT CONTACT AROUND THE ENTIRE CIRCUMFERENCE AND FULL WIDTH OF BEARING SURFACE.
3. FOR OVERLAYS, CONTRACTOR SHALL REMOVE COVER & CASE AND INSTALL TEMPORARY PLATE. AFTER ASPHALT WORK IS COMPLETE, MONUMENT CASE AND LID SHALL BE REPLACED AND ADJUSTED TO FINISH GRADE.
4. ON NEW PAVING PROJECTS, MONUMENTS SHALL BE INSTALLED AFTER FINAL LIFT. CONTRACTOR SHALL COORDINATE WITH A LICENSED SURVEYOR FOR PROPER LOCATION OF BRONZE MARKER.

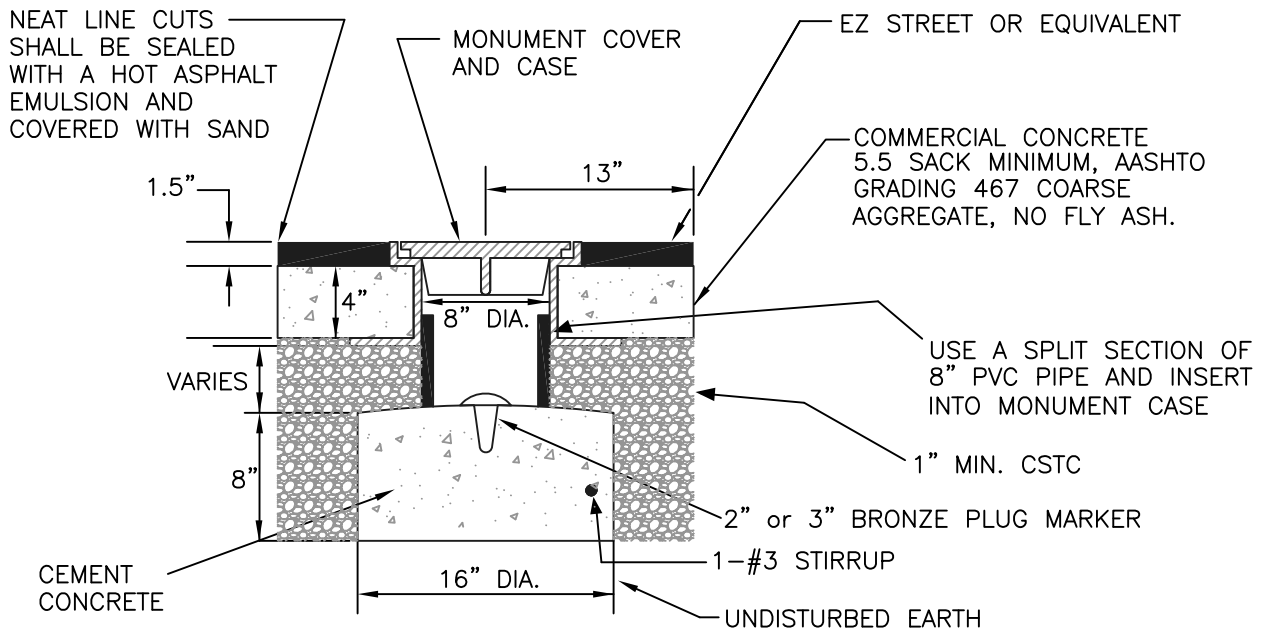

**CITY OF
PUYALLUP**

DEVELOPMENT ENGINEERING and
PUBLIC WORKS DEPARTMENTS

MONUMENT

DRAWN BY JIM ERWIN-SVOBODA	CHECKED BY LINDA LIAN	APPROVED BY COLLEEN HARRIS	REVISED BY XXXX	CITY STANDARD
FILE NAME F:\DWG\COMMON\STDS\CITY\2009\01_STR\01.01\01.01.17	DATE APPROVED 07/01/2009	DATE REVISED XX/XX/XX	SCALE 1:1	01.01.17